




DRIVESHAFT AND BEARINGS MANUFACTURE C...

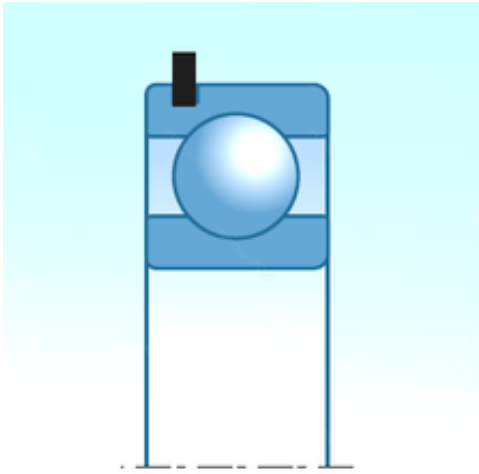

17,000 mm x 40,000 mm x 12,000 mm NTN
6203LLUNR deep groove ball bearings

Bearing No. 6203LLUNR

6203LLUNR Bearing 2D drawings and 3D CAD models

Size	17x40x12 mm
Bore Diameter	17,000 mm
Outer Diameter	40,000 mm
Width	12,000 mm
d	17,000 mm
D	40,000 mm
B	12,000 mm
C	12,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.068
EAN	4547359560404
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric



DRIVESHAFT AND BEARINGS MANUFACTURE C...

Long Description	17MM Bore; 40MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6203LLUNR/2A
Weight / LBS	0.15
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.575 Inch 40 Millimeter
Bore	0.669 Inch 17 Millimeter
bore diameter:	17 mm
precision rating:	ISO Class 0
outside diameter:	40 mm
finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	With Snap Ring
maximum rpm (grease):	12000 rpm
internal clearance:	CN



DRIVESHAFT AND BEARINGS MANUFACTURE C...

fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	21000 RPM
dynamic load capacity:	9600 N
series:	62
static load capacity:	4600 N
manufacturer product page:	Click here