




DRIVESHAFT AND BEARINGS MANUFACTURE C...

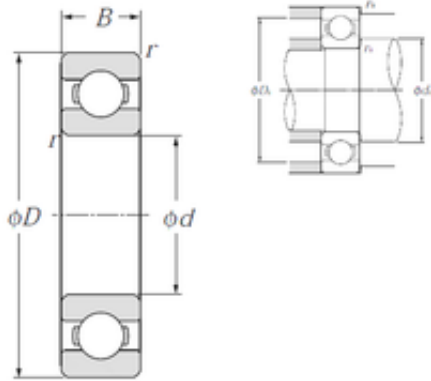

50 mm x 80 mm x 16 mm NTN 6010 deep groove ball bearings

Bearing No. 6010

6010 Bearing 2D drawings and 3D CAD models

Size	50x80x16 mm
Bore Diameter	50 mm
Outer Diameter	80 mm
Width	16 mm
d	50 mm
D	80 mm
B	16 mm
C	16 mm
r min.	1 mm
da min.	55 mm
da max	57,5 mm
Da max.	75 mm
ra max.	1 mm
Weight	0,261 Kg
Basic dynamic load rating (C)	21,8 kN
Basic static load rating (C0)	16,6 kN
(Grease) Lubrication Speed	8 400 r/min
(Oil) Lubrication Speed	9 800 r/min
rs min	1 mm
Radial clearance class	CN
Mass	0.26 kg
Dynamic load, C	21.8 kN
Static load, C0	16.6 kN
Fatigue limit load, Cu	0.75 kN
f0	15.5



DRIVESHAFT AND BEARINGS MANUFACTURE C...

Nlim (oil)	9,800 rpm
Nlim (grease)	8,400 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.31 Hz
Characteristic outer ring frequency, BPF0	6.06 Hz
Characteristic inner ring frequency, BPF1	7.94 Hz
da min	55 mm
Da max	75 mm
ra max	1 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.26
EAN	4547359003956
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C3-Loose
Inch - Metric	Metric



DRIVESHAFT AND BEARINGS MANUFACTURE C...

Long Description	50MM Bore; 80MM Outside Diameter; 16MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6010
Weight / LBS	0.575
Bore	1.969 Inch 50 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
bore diameter:	50 mm
finish/coating:	Uncoated
outside diameter:	80 mm
bearing material:	High Carbon Chrome Steel
overall width:	16 mm
cage material:	Steel
bore type:	Round
inner ring width:	16 mm
closure type:	Open
outer ring width:	16 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	8400 rpm
snap ring included:	Without Snap Ring
maximum rpm (oil):	9800 rpm
internal clearance:	CN



DRIVESHAFT AND BEARINGS MANUFATURE C...

fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	9800 RPM
dynamic load capacity:	21800 N
series:	60
static load capacity:	16600 N
manufacturer product page:	Click here
precision rating:	Class 0